




# Stainless Steel Braided Flexible Pump Connectors



### ASSEMBLY MATERIALS

- Hose:** 304 Stainless Steel Corrugated Hose
- Braid:** Stainless Steel 304 (8" and Larger is Braided Braid)
- Grooved Ends:** CS SCH 40 Grooved Pipe Fitting

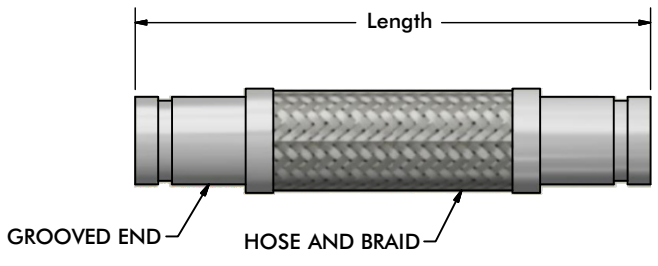

Model No. Nominal Bore x Overall Length	Working Pressure @ 70°F (PSIG)	Working Pressure @ 250°F (PSIG)	Static Bend Radius (inch)	Dynamic Bend Radius (inch)
EFMHPC-GC 2" x 12"	530	466	6.30	12.60
EFMHPC-GC 2.5" x 14"	410	360	6.88	20
EFMHPC-GC 3" x 14"	335	294	9.10	24
EFMHPC-GC 4" x 15"	240	211	9.84	29.50
EFMHPC-GC 5" x 16"	192	168	12.52	35.44
EFMHPC-GC 6" x 16"	165	145	13.90	41.35
EFMHPC-GC 8" x 17"	234	205	20	40
EFMHPC-GC 10" x 18"	230	202	25	50
EFMHPC-GC 12" x 19"	161	141	30	60