



Heavy duty U-Bolt designed to grip, guide or support plain and insulated pipes.


## Features

- Besides model listed in the table below, a full range of intermediate sizes is available to match the ODs of Easyflex RSI, providing a simple and effective support solution for insulated pipe.
- Easyflex U-Bolt are available with EPDM sleeve, to prevent contact between dissimilar material when used with copper, plastic, aluminum or glass pipe. Lining has a temperature range of -20°C to 110°C.

**Material :** Steel

**Finish :** Electro galvanized post manufacture.


**Other Options :** U-Bolt with EPDM Sleeve (Suffix 'RL')  
 Epoxy Powder Coated Finish (Suffix 'PC')  
 Hot Dip Galvanised Finish (Suffix 'HDG')  
 Stainless Steel Construction (Suffix 'SS')  
 Brass Construction (Suffix 'BR')

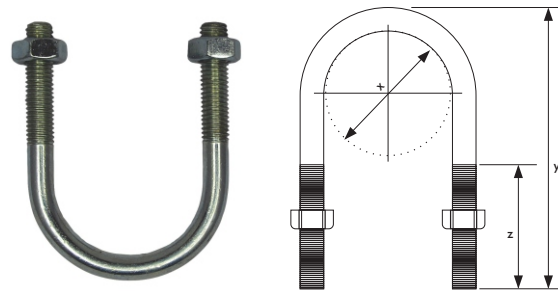

## Ordering

- Intermediate U-Bolt models are available, suitable for any insulated pipe OD. Please specify effective pipe OD or size plus insulation thickness.
- Where Easyflex Rubber Support Inserts (RSI) are used, specifying 'matching U-Bolt' will suffice.
- If EPDM sleeve U-Bolts are required, specify pipe ODs to enable selection of suitable models.

**Compliance - US Standards MSS-SP58 (type 24)  
 MSS-SP69; EG to ASTM B633 SC3, BS 1706 FE/ZN12**

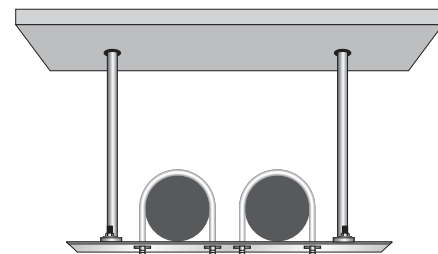

Model No.	Size	Threaded Connection	Dimension (inches)	
			x	z
EFUB022	1/2"	1/4"	0.83	1.18
EFUB028	3/4"	1/4"	1.06	1.18
EFUB035	1"	1/4"	1.34	1.57
EFUB042	1 1/4"	1/4"	1.69	1.57
EFUB048	1 1/2"	1/4"	1.89	1.57
EFUB060	2"	1/4"	2.36	1.57
EFUB075	2 1/2"	5/16"	2.99	2.36
EFUB090	3"	5/16"	3.50	2.36
EFUB115	4"	5/16"	4.53	2.36
EFUB140	5"	3/8"	5.51	2.56
EFUB160	6"	3/8"	6.61	3.15
EFUB219	8"	3/8"	8.62	3.15

- Due to policy of continual improvement, the specifications are subject to change without prior notice.
- Measurements are subject to 5% tolerance.