


Easyflex

TM

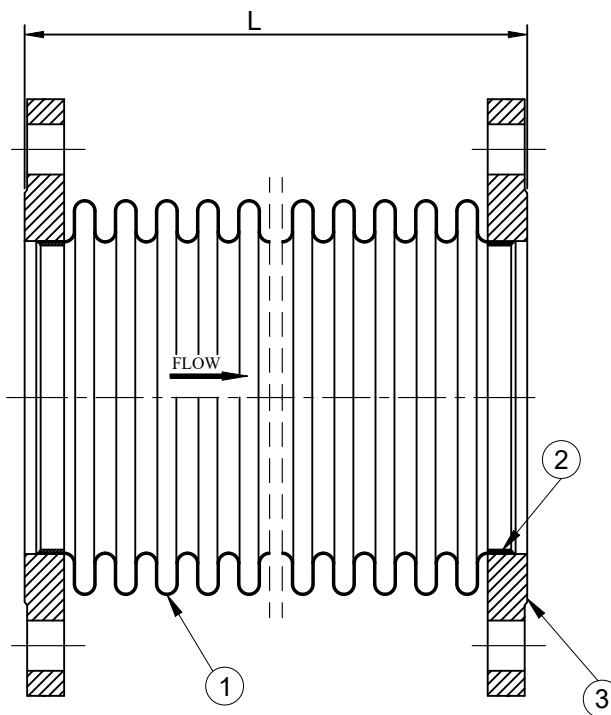

*Tolerance in length: ± 3 mm / $\pm \frac{1}{8}$ "

NPS	Size	Length(L)	Working Pressure	Working Temperature	Movement Axial	Movement Lateral	Life Cycle	Flange Standard
	(DN)	mm/inch	barg/Psig	°C/°F	mm/inch	mm/inch		
2	50	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
2 1/2	65	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
3	80	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
4	100	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
5	125	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
6	150	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
8	200	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
10	250	150/5.9	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
12	300	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
14	350	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
16	400	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
18	450	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
20	500	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF
24	600	200/7.87	10.34/150	250/482	$\pm 10/\pm 0.4$	$\pm 2/\pm 0.08$	Above 10000	ANSI B 16.5#150 SORF

Notes :

1. Bellow Tolerance will be as per EJMA 10th Edition.
2. Shipping bar will be provided painted in yellow, removed it after installation.
3. All surface will be smooth finish, free from welding burrs and Sharp edges.


Testing :

1. 100% Die penetration test on weld joints where ever applicabale.
2. Raw material check test for chemical composition and mechanical
3. Dimension and visual check.

3	Flange (ANSI B16.5 #150 SORF)	IS 2062 Gr.B	2
2	Collar	A 240 Gr. 304	2
1	Bellow	A 240 Gr. 304	1
Sl.No.	Description	Material	Pcs

Bill of Material

Client Name:-



Shipping Bar Arrangement

DRAWN BY	-
CHECKED BY	-
APPROVED BY	-
SCALE:	NTS
DRAWING No.	-
DATE	REV:- 00

OWNER :
Easyflex /VibraSystems