



Confidential : All rights reserved ISO 16016. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without prior permission. All rights reserved in the event of the granting of a patent or the registration of a utility model or design. Offenders will be held liable for the payment of damages.

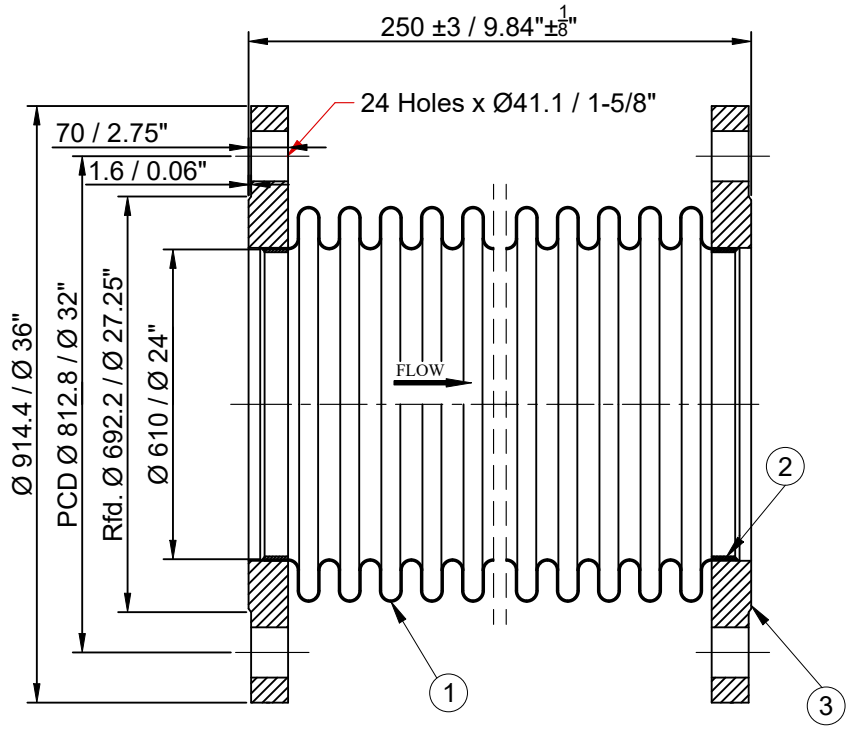

SECTION A-A

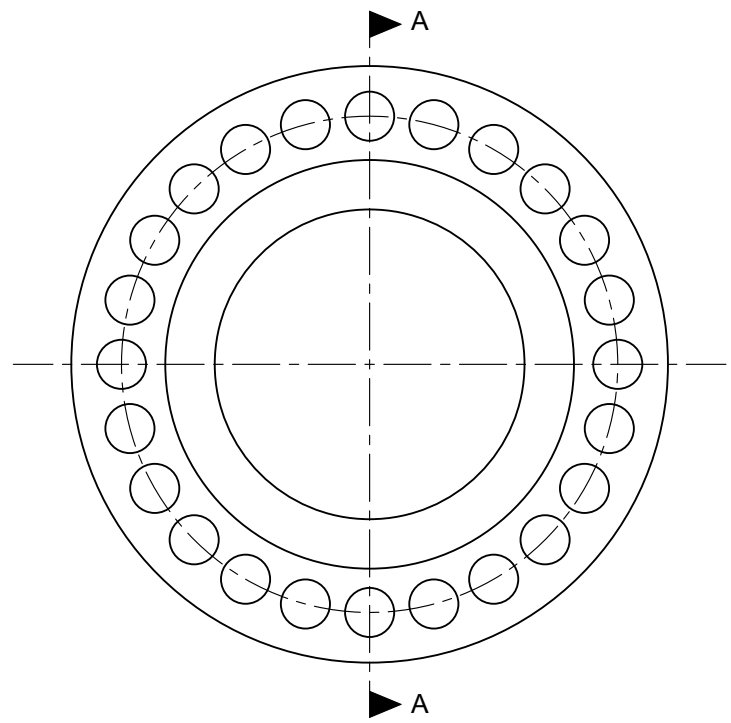


*All dimensions are in mm. unless specified.

Design Code:	EJMA 10th Edition			
Size:(DN)	600 NB		24 "	
Design Pressure :	15.86 bar(g)		230 PSI(g)	
Design Temperature :	250°C		482°F	
Test Pressure:	23.79 bar(g)		345 PSI(g)	
Life Cycle:	Above 10,000			
Weight:	~ 440 Kg		~ 970 lb	
Movement Capacity:	(+) (mm)		(-) (mm)	
	(Inch)		(Inch)	
Axial Movement:	10	0.40"	10	0.40"
Lateral Movement:	2	0.08"	2	0.08"
Angular Movement:	0°	0°	0°	0°
Torsional Movement:	0°	0°	0°	0°

Space for Client Approval

Seal & Signature



Shipping Bar Arrangement

- Notes :**
1. Bellow Tolerance will be as per EJMA 10th Edition.
 2. Shipping bar will be provided painted in yellow, removed it after installation.
 3. All surface will be smooth finish, free from welding burrs and Sharp edges.

- Testing :**
1. 100% Die penetration test on weld joints where ever applicabale.
 2. Raw material check test for chemical composition and mechanical properties.
 3. Dimension and visual check.

3	Flange (ANSI B16.5 #300 SORF)	IS 2062 Gr.B	2
2	Collar	A 240 Gr. 304	2
1	Bellow	A 240 Gr. 304	1
Sl.No.	Description	Material	Pcs

Bill of Material

Client Name:-

DRAWN BY	-
CHECKED BY	-
APPROVED BY	-
SCALE: NTS	
DRAWING No.	-
DATE	REV:- 00

OWNER :
Easyflex /VibraSystems

No	Revision Description	Date
----	----------------------	------