

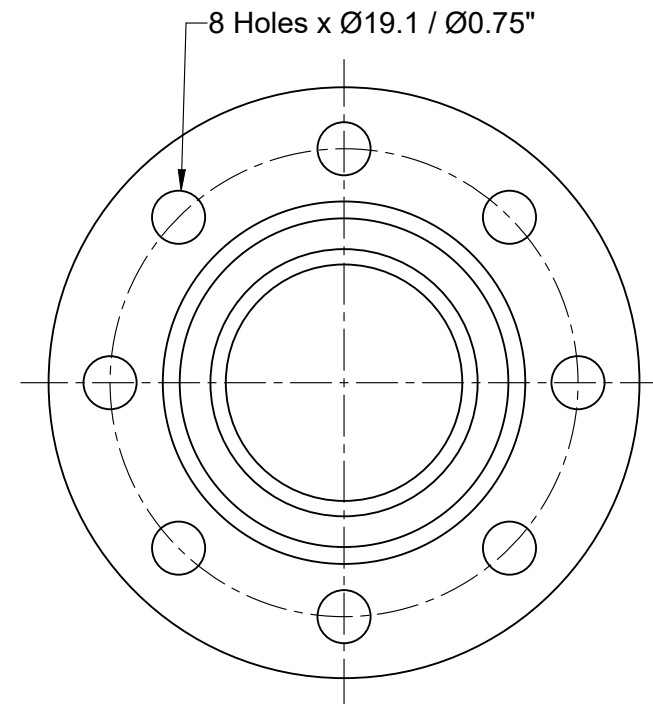


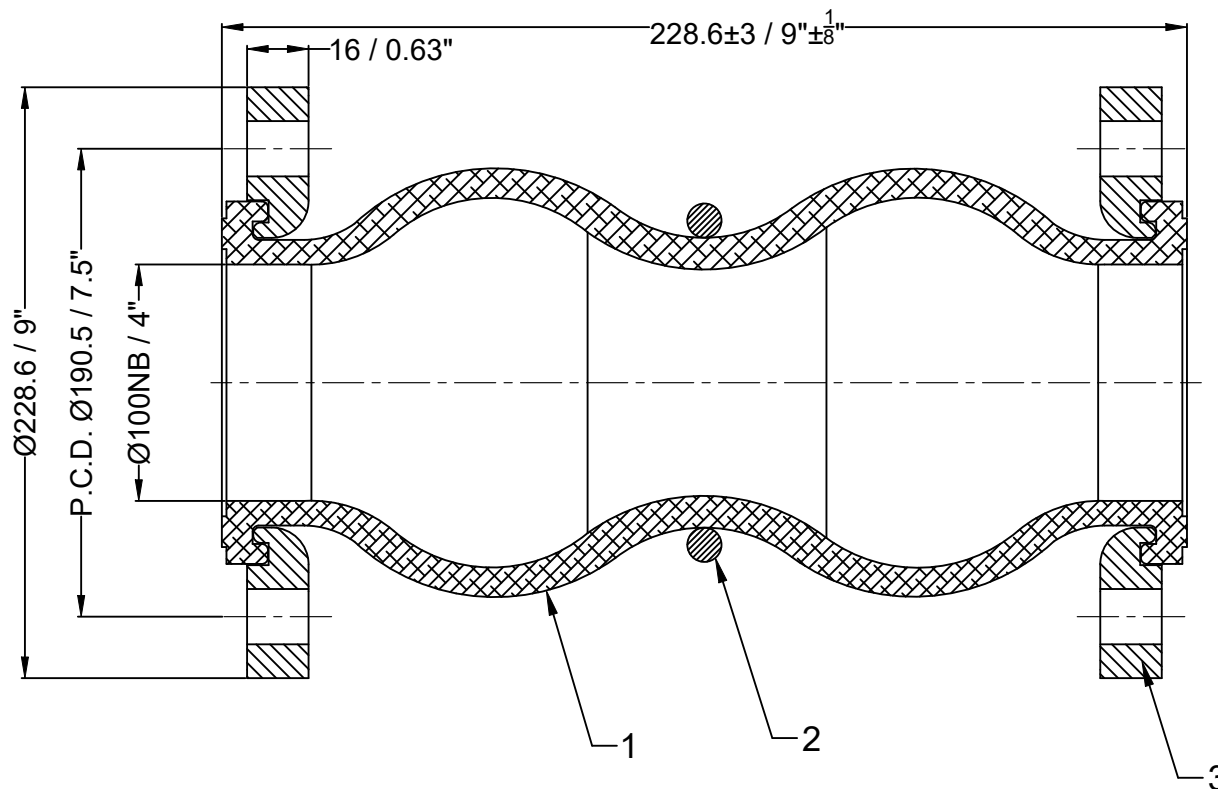

Design Code:	FSA USA Standard			
Size:(DN)	100	4 "		
Pressure Rating :	16 bar(g)	232 PSI(g)		
Max. Temperature :	115°C	239°F		
Test Pressure:	24 bar(g)	348 PSI(g)		
Movement Capacity:	(+) (mm)		(-) (mm)	
	(mm)	(Inch)	(mm)	(Inch)
Axial Movement:	35	1.375"	50.8	2"
Lateral Movement:	39.7	1.56"	39.7	1.56"
Angular Movement:	35°	35°	35°	35°



A.	Inner Cover EPDM
B.	Outer Cover EPDM
C.	Reinforce nylon cord fabric
D.	Hard steel wire

Seal & Signature

No	Revision Description	Date
----	----------------------	------

3	Flange	IS 2062 Gr.B (Hot Dip Galvanized)	2
2	Ring	SS 304	1
1	Bellow	EPDM	1
Sl.No.	Description	Material	Pcs

Bill of Material

Title:-EPDM Twin Sphere Floating Flange Rubber Expansion Joint with Floating Flanges

Client Name:-

DRAWN BY
CHECKED BY
APPROVED BY

SCALE: NTS

DRAWING No.

DATE

REV:- 00

OWNER :
Easyflex / VibraSystems

Notes :

1. Bellow Tolerance will be as per FSA USA Standard.
2. Flange drill dimension will be as per ANSI B16.5#150.
3. Matching flange should be of flat face .

Testing :

1. Raw material check test for chemical composition and mechanical properties.
2. Dimension and visual check.