


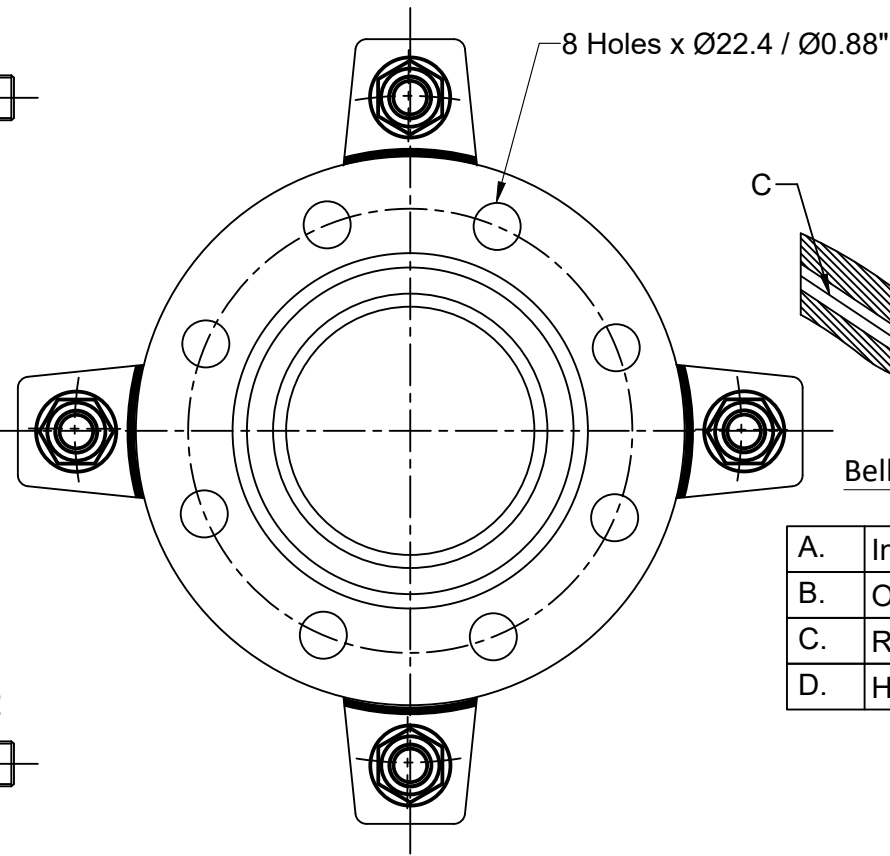

A.	Inner Cover EPDM
B.	Outer Cover EPDM
C.	Reinforce nylon cord fabric
D.	Hard steel wire

5	Nut , Washer	IS 1367 Cl 4.0,IS 2016 (Zinc Electroplated)	40
4	Limit Rod	IS 1367 Cl 4.6 (Zinc Electroplated)	4
3	Lugs	IS 2062 Gr.B (Hot Dip Galvanized)	8
2	Flange	IS 2062 Gr.B (Hot Dip Galvanized)	2
1	Bellow	EPDM	1
Sl.No.	Description	Material	Pcs

Client Name:-

OWNER :
Easyflex / VibraSystems

Notes :

1. Bellow Tolerance will be as per FSA USA Standard.
2. Flange drill dimension will be as per ANSI B16.5#150.
3. Matching flange should be of flat face .

Testing :

1. Raw material check test for chemical composition and mechanical properties.
2. Dimension and visual check.

No	Revision Description	Date