
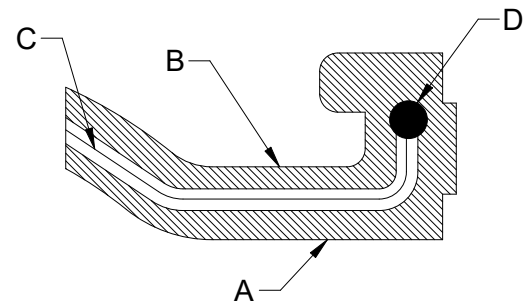
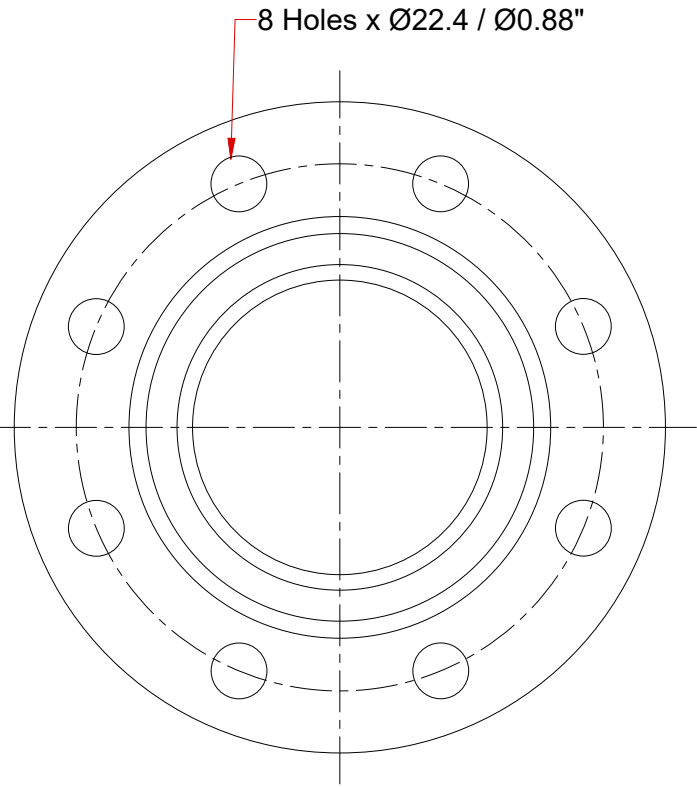


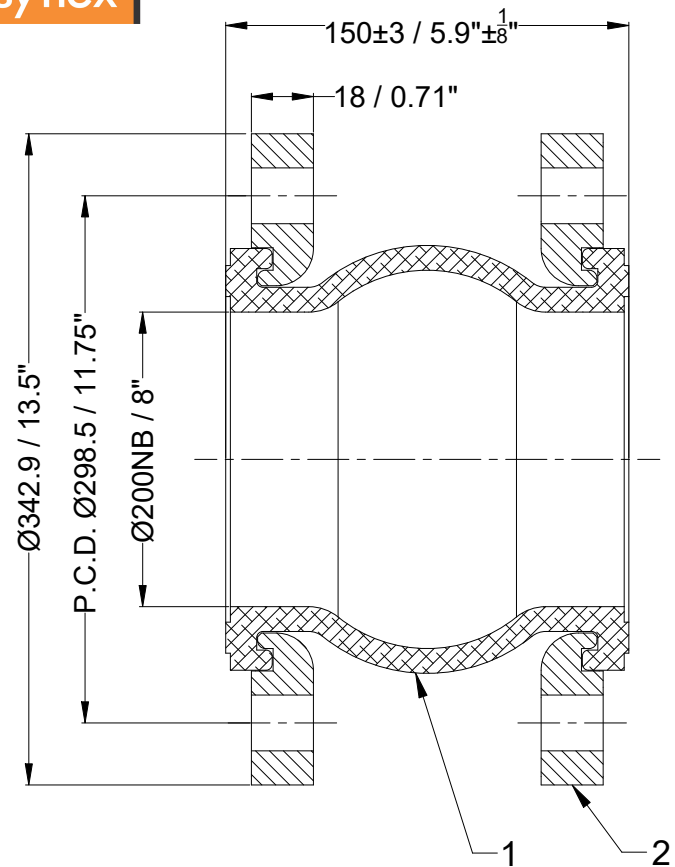

Bellow Cross-Section Details

A.	Inner Cover EPDM
B.	Outer Cover EPDM
C.	Reinforce nylon cord fabric
D.	Hard steel wire

Design Code:	FSA USA Standard	
Size:(DN)	200	8 "
Pressure Rating :	16 bar(g)	232 PSI(g)
Max. Temperature :	115°C	239°F
Test Pressure:	24 bar(g)	348 PSI(g)

Movement Capacity:	(+)		(-)	
	(mm)	(Inch)	(mm)	(Inch)
Axial Movement:	12	0.47"	16	0.63"
Lateral Movement:	16	0.63"	16	0.63"
Angular Movement:	15°	15°	15°	15°

Space for Client Approval

Seal & Signature

2	Flange	SS 304	2
1	Bellow	EPDM	1
Sl.No.	Description	Material	Pcs

Bill of Material

Title:-EPDM Floating Flange Rubber Expansion Joint with SS304 Floating Flanges

Client Name:-

DRAWN BY	
CHECKED BY	
APPROVED BY	

OWNER :
Easyflex / VibraSystems

SCALE: NTS

DRAWING No.		
DATE		REV:- 00

<u>Notes :</u> 1. Bellow Tolerance will be as per FSA USA Standard. 2. Flange drill dimension will be as per ANSI B16.5#150. 3. Matching flange should be of flat face . <u>Testing :</u> 1. Raw material check test for chemical composition and mechanical properties. 2. Dimension and visual check.

No	Revision Description	Date