


Confidential : All rights reserved ISO 16016. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without prior permission. All rights reserved in the event of the granting of a patent or the registration of a utility model or design. Offenders will be held liable for the payment of damages.

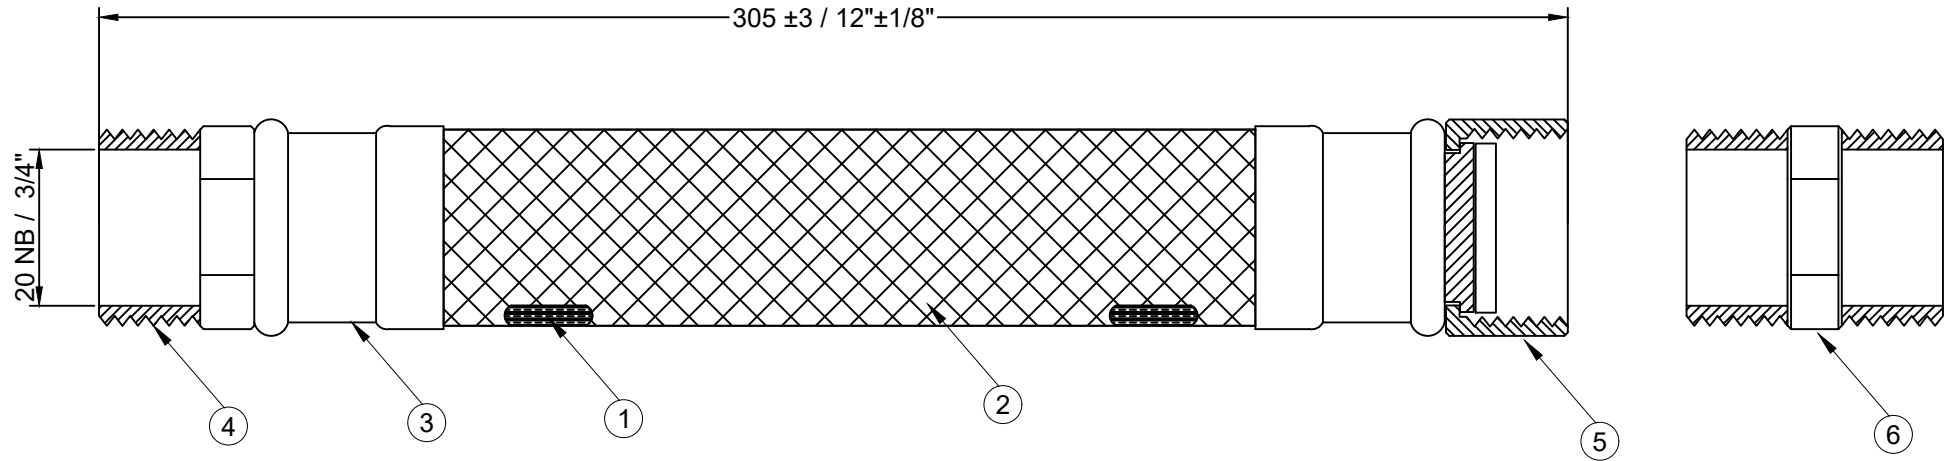

*All dimensions are in mm. unless specified.

Size:(NB)	20	3/4"
Working Pressure :	25 bar(g)	362.6 PSI(g)
Design Temperature :	-20°C To 110°C	-4 °F to 230 °F
Test Pressure:	37.5 bar(g)	544 PSI(g)
Bend Radius (minimum):	100mm	3.94"
Application:	Mechanical Equipment & Water	

Testing :
1. Dimension and visual check.

Space for Client Approval

Seal & Signature

No	Revision Description	Date

6	3/4" MNPT Male Thread Adapter	Brass	1
5	3/4" FNPT (Female Swivel Thread)	Brass	1
4	3/4" MNPT (Male Thread)	Brass	1
3	Neck Ring	SS 304	2
2	Braided	SS 304	1
1	Elastomer	EPDM	1
Sl.No.	Description	Material	Pcs

Bill of Material

Title :- Flexible Connector EPDM Hose With SS304 Braiding

Client Name:-

DRAWN BY	-
CHECKED BY	-
APPROVED BY	-
SCALE: NTS	
DRAWING No.	-
DATE	-
REV:-	00

OWNER :
Easyflex /VibraSystems