


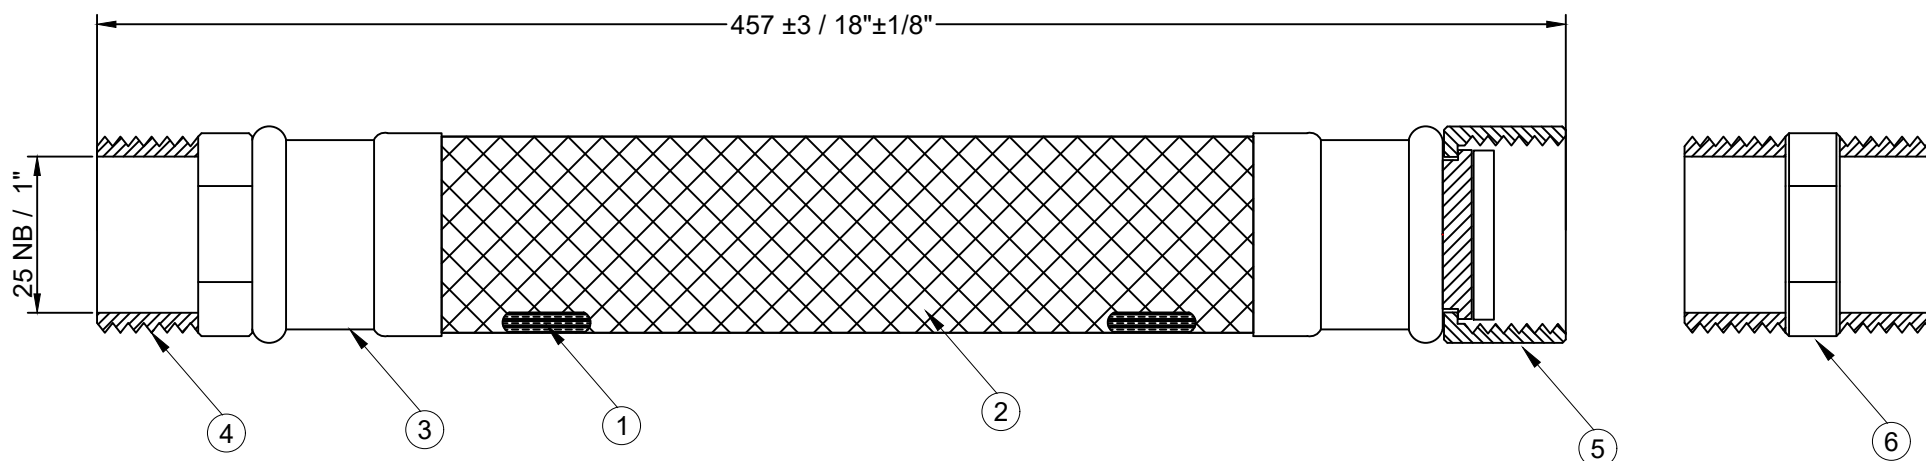

*All dimensions are in mm.
unless specified.

Size:(NB)	25	1"
Working Pressure :	16 bar(g)	232 PSI(g)
Design Temperature :	-20°C To 110°C	-4 °F to 230 °F
Test Pressure:	24 bar(g)	348 PSI(g)
Bend Radius (minimum):	125mm	4.92"
Application:	Mechanical Equipment & Water	

Testing :

1. Dimension and visual check.

Space for Client Approval

Seal & Signature

6	1" MNPT Male Thread Adapter	Brass	1
5	1" FNPT (Female Swivel Thread)	Brass	1
4	1" MNPT (Male Thread)	Brass	1
3	Neck Ring	SS 304	2
2	Braided	SS 304	1
1	Elastomer	EPDM	1
Sl.No.	Description	Material	Pcs

Bill of Material

Title :- Flexible Connector EPDM Hose With SS304 Braiding

Client Name:-	
---------------	--

	DRAWN BY
--	----------

CHECKED BY	
APPROVED BY	

APPROVED BY _____

SCALE: NTS _____

SCALE: NTS

DRAWING No.

DATE

REV:- 00

OWNER :
Easyflex /VibraSystems

No	Revision Description	Date
----	----------------------	------