


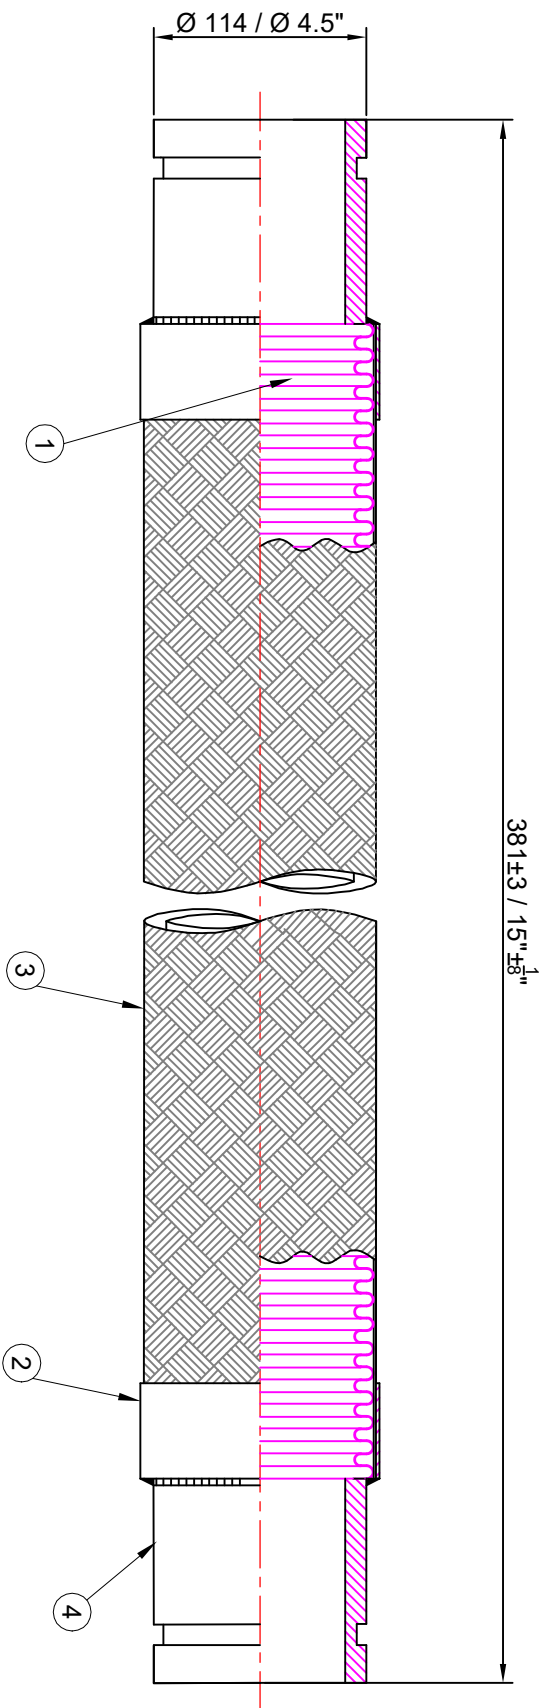

* All dimensions are in mm.
unless specified.

Size:(DN)	100 NB	4"	Space for Client Approval		4	Grooved End (Sch 40)	ASTM A 106 Gr.B	2		
Design Pressure :	16 bar(g)	232 PSI(g)			3	Single Braiding	SS 304	1		
Design Temperature :	23°C	73.4°F			2	Neck ring	SS 304	2		
Test Pressure:	24 bar(g)	348 PSI(g)			1	Corrugation	A 240 Gr. 304	1		
Minimum Centerline Bend Radius			SI.No.	Description	Material	Pcs				
Static:	290 mm	11.5"	Seal & Signature							
Dynamic:	560 mm	22"								
Lateral Offset:	12 mm	1/2"								
Notes : 1. All surface will be smooth finish, free from welding burrs and Sharp edges. 2. The Burst pressure is 4 times the Design Pressure. Testing : 1. 100% Die penetration test on weld joints where ever applicable. 2. Raw material check test for chemical composition and mechanical properties. 3. Dimension and visual check.			Title:- Flexible Metallic Pump Connector with Grooved End							
			Bill of Material							
			DRAWN BY : -						OWNER : Easyflex /WibraSystems	
			CHECKED BY : -							
APPROVED BY : -										
SCALE: NTS										
DRAWING No. -										
DATE										
REV:- 00										