


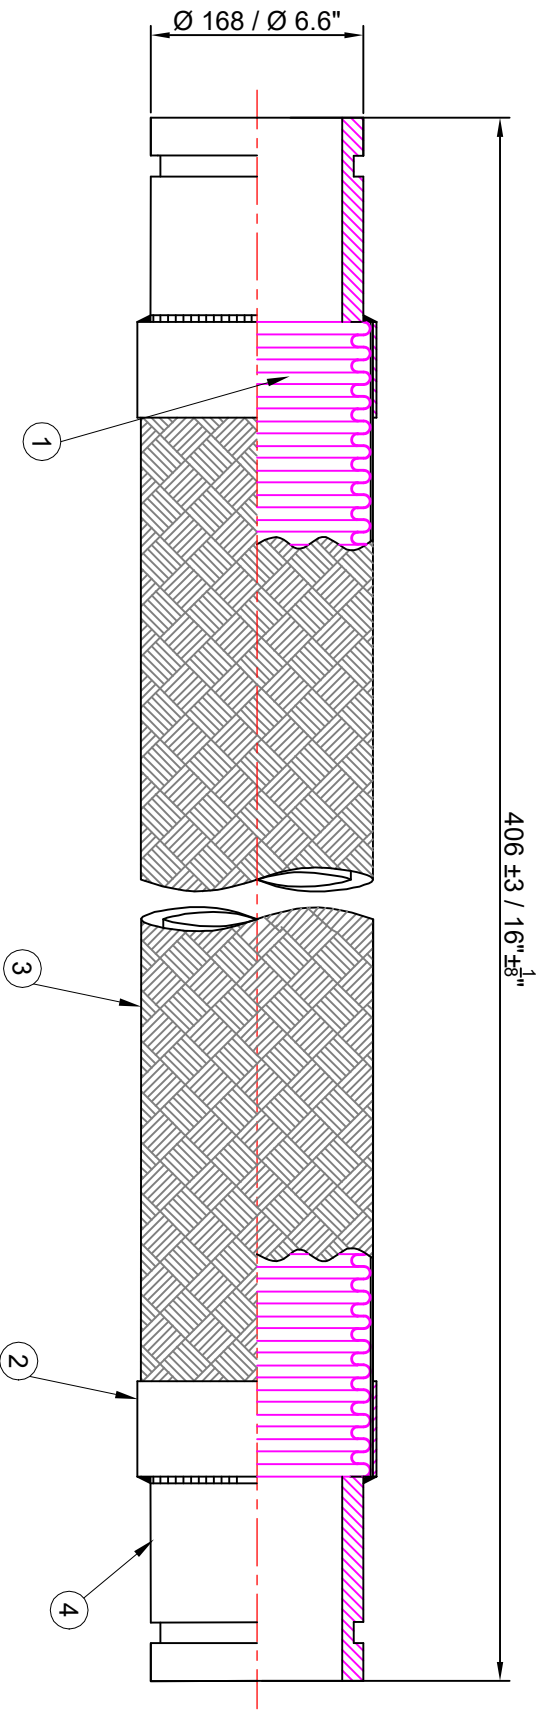

* All dimensions are in mm.
unless specified.

Size:(DN)	150 NB	6"	Space for Client Approval		4	Grooved End (Sch 40)	ASTM A 106 Gr.B	2
Design Pressure :	16 bar(g)	232 PSi(g)			3	Double Braiding	SS 304	1
Design Temperature :	23°C	73.4°F			2	Neck ring	SS 304	2
Test Pressure:	24 bar(g)	348 PSi(g)			1	Corrugation	A 240 Gr. 304	1
Minimum Centerline Bend Radius					Sl.No.	Description	Material	Pcs
Static:	380 mm	15"	Seal & Signature		Bill of Material			
Dynamic:	815 mm	32"						
Lateral Offset:	12 mm	1/2"						
Notes :					Title:- Flexible Metallic Pump Connector with Grooved End			
Testing :					OWNER :			
1. 100% Die penetration test on weld joints where ever applicabale.					Easyflex /WibraSystems			
2. Raw material check test for chemical composition and mechanical properties.								
3. Dimension and visual check.								
Revision								
No								
Revision Description								
Date								
DATE					REV:- 00			