


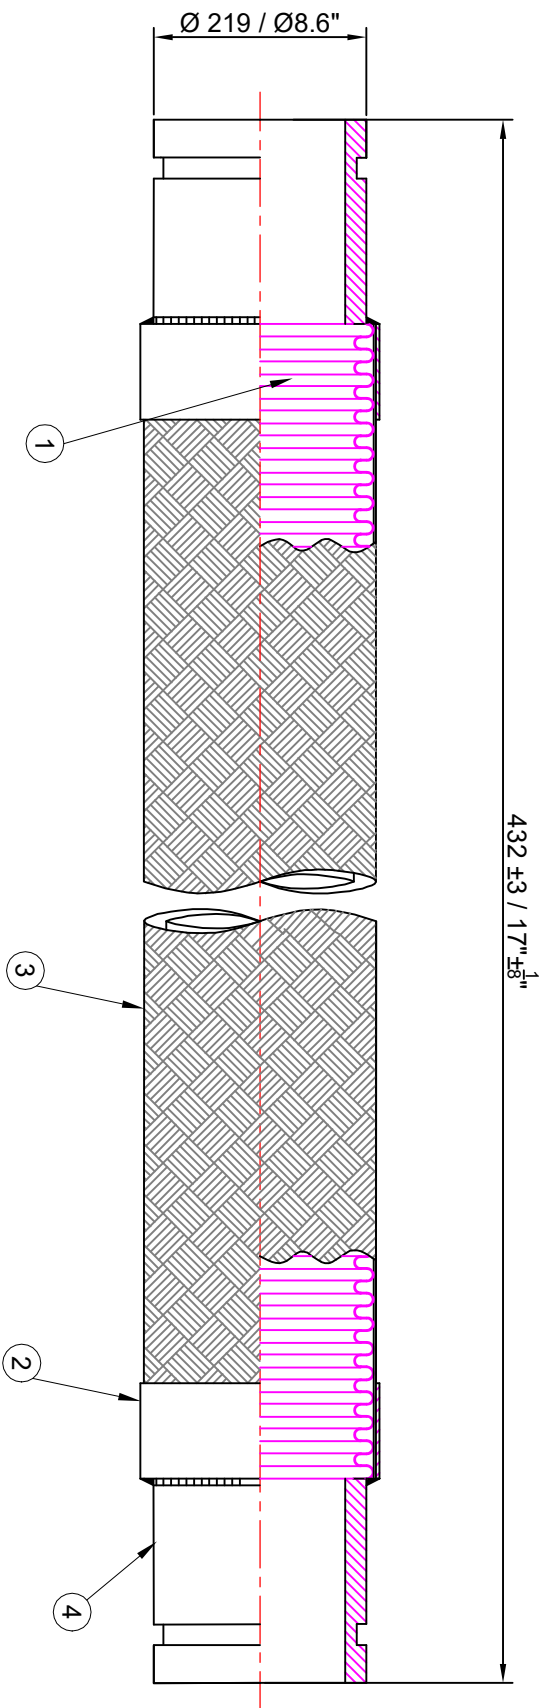

* All dimensions are in mm.
unless specified.

Size:(DN)	200 NB	8"	Space for Client Approval		4	Grooved End (Sch 40)		ASTM A 106 Gr.B	2
Design Pressure :	13 bar(g)	188.5 PSI(g)			3	Double Braiding		SS 304	1
Design Temperature :	23°C	73.4°F			2	Neck ring		SS 304	2
Test Pressure:	19 bar(g)	275.5 PSI(g)			1	Corrugation		A 240 Gr. 304	1
Minimum Centerline Bend Radius					Sl.No.	Description		Material	Pcs
Static:	500 mm	20"	Seal & Signature		Bill of Material				
Dynamic:	1015 mm	40"							
Lateral Offset:	12 mm	1/2"							
Notes :					Title:- Flexible Metallic Pump Connector with Grooved End				
Testing : 1. 100% Die penetration test on weld joints where ever applicabale. 2. Raw material check test for chemical composition and mechanical properties. 3. Dimension and visual check.					DRAWN BY		-		OWNER : Easyflex /WibraSystems
					CHECKED BY		-		
					APPROVED BY		-		
					SCALE: NTS				
					DRAWING No.		-		
					DATE				
					Revision Description		Date		
					No				