


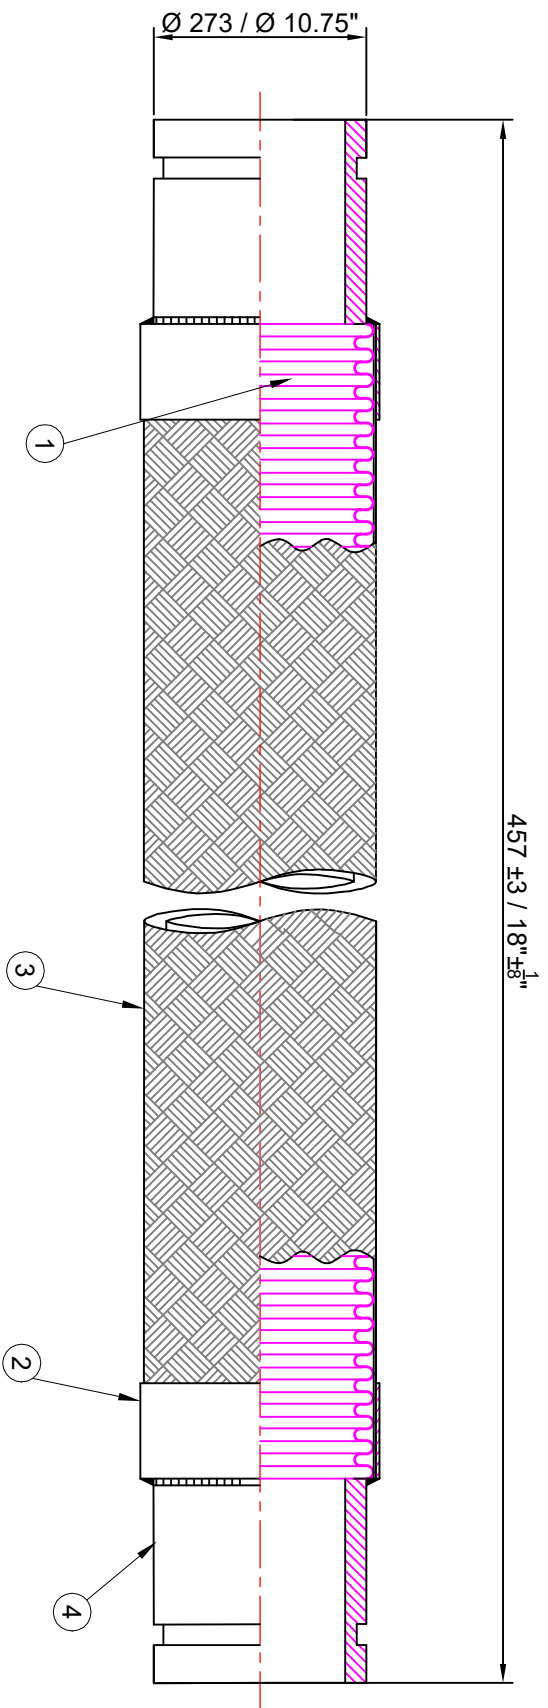

* All dimensions are in mm.
unless specified.

Size:(DN)	250 NB	10"	Space for Client Approval	4	Grooved End (Sch 40)		ASTM A 106 Gr.B	2
Design Pressure :	12 bar(g)	174 PSI(g)		3	Double Braiding		SS 304	1
Design Temperature :	23°C	73.4°F		2	Neck ring		SS 304	2
Test Pressure:	18 bar(g)	261 PSI(g)		1	Corrugation		A 240 Gr. 304	1
Minimum Centerline Bend Radius				Sl.No.	Description		Material	Pcs
Static:	620 mm	24.4"	Bill of Material					
Dynamic:	1270 mm	50"						
Lateral Offset:	12 mm	1/2"						
Notes :			Title:- Flexible Metallic Pump Connector with Grooved End					
1. All surface will be smooth finish,free from welding burrs and Sharp edges.								
2. The Burst pressure is 4 times the Design Pressure.								
Testing :								
1. 100% Die penetration test on weld joints where ever applicabale.			OWNER : Easyflex /VibraSystems					
2. Raw material check test for chemical composition and mechanical properties.								
3. Dimension and visual check.								
No								
Revision Description			DATE					
Date			DRAWN BY		-		-	
			CHECKED BY		-			
			APPROVED BY		-			
			SCALE: NTS					
			DRAWING No.		-			
			DATE				REV:- 00	